



la meccanica
Technology & Creativity at your Service



CLM 630 220HP


PELLET
MILL

Feeds



PELLET MILL CLM 630 220hp

PELLET MILL	PRESSE A GRANULAIRE	PRESSA CUBETTATRICE	PRENSA GRANULADORA	CLM 630 220HP		
Screw feeder	Vis d'alimentation	Coclea di alimentazione	Còclea de alimentaciòn	C245		
Diameter	Diamètre	Diámetro	Diàmetro	mm	245	in 9,65
Motor power	Puissance	Potenza	Potencia motor	kW	4,0	hp 5,5
Speed	Vitesse	Velocità	Velocidad	0-158 rpm		
Conditioner	Conditionneur	Condizionatore	Acondicionator	M500.2310		
Diameter	Diamètre	Diámetro	Diàmetro	mm	500	in 19,7
Length	Longeur	Lunghezza	Longitud	mm	2310	in 90,9
Volum	Volume	Volume	Volumen	dm ³	453,3	ft ³ 16,0
Motor power	Puissance	Potenza	Potencia motor	kW	15,0	hp 20,0
Pellet mill Bloc	Bloc Presse	Blocco Pressa	Bloque prensa	CLM 630 220HP		
Main motor power	Puissance moteur principal	Potenza motore principale	Motor Principal	kW	160	hp 220
Main pulley	Poulie conduit	Puleggia cond.	Polea principal	mm	1105	in 43,5
Die speed	Vitesse filiere	Velocità filiera	Velocidad matriz	m/sec	6,0	ft/sec 19,7
				m/sec	7,5	ft/sec 24,6
Belts	Courroies	Cinghie	Correas	n.22 belts type 5V-1800/2000		
Die	Filiere	Trafila	Matriz	Die Lamec 630.200		
Inner diameter	Diamètre int.	Diámetro interno	Diàmetro int.	mm	630	in 24,80
Working width	Bande de travail	larghezza utile	Anchura de trabajo	mm	200	in 7,87
Total width	largeur totale	larghezza totale	Anchura total	mm	260	in 10,24
Working surface	Surface de travail	Superficie utile	Superficie útil	dm ²	39,56	in ² 613,2
Die	Filiere	Trafila	Matriz	Die Lamec 630.240		
Inner diameter	Diamètre int.	Diámetro interno	Diàmetro int.	mm	630	in 24,80
Working width	Bande de travail	larghezza utile	Anchura de trabajo	mm	240	in 9,45
Total width	largeur totale	larghezza totale	Anchura total	mm	310	in 12,20
Working surface	Surface de travail	Superficie utile	Superficie útil	dm ²	47,50	in ² 735,90
Roll type	Galets	Rulli tipo	Rodillos	Rolls Lamec 630.200 & 630.240		
N. rolls	N. de galets	N. rulli	N. rodillos	2		
Diameter	Diamètre	Diámetro	Diàmetro	mm	310	in 12,20
WEIGHTS	POIDS	PESI	PESOS			
Bloc press	Bloc press	Blocco pressa	Peso del bloque			
Without main motor	Sans moteur principal	Motore principale escluso	Sin el motor principal	kg	5.500	lb 12.120
With main motor	Avec moteur principal	Motore principale incluso	Con el motor principal	kg	6.800	lb 14.980
Screw feeder and conditioner	Vis d'alimentation et conditionneur	Coclea di alimentazione e condizionatore	Peso del alimentador y del acondicionador	kg	950	lb 2.090
Total Weight	Poids Total	Peso totale	Peso total			
Main motor excluded	Moteur principal exclu	Motore principale escluso	Motor principal excluido	kg	6.500	lb 14.320
Main motor included	Moteur principal inclu	Motore principale incluso	Motor principal incluido	kg	7.800	lb 17.190

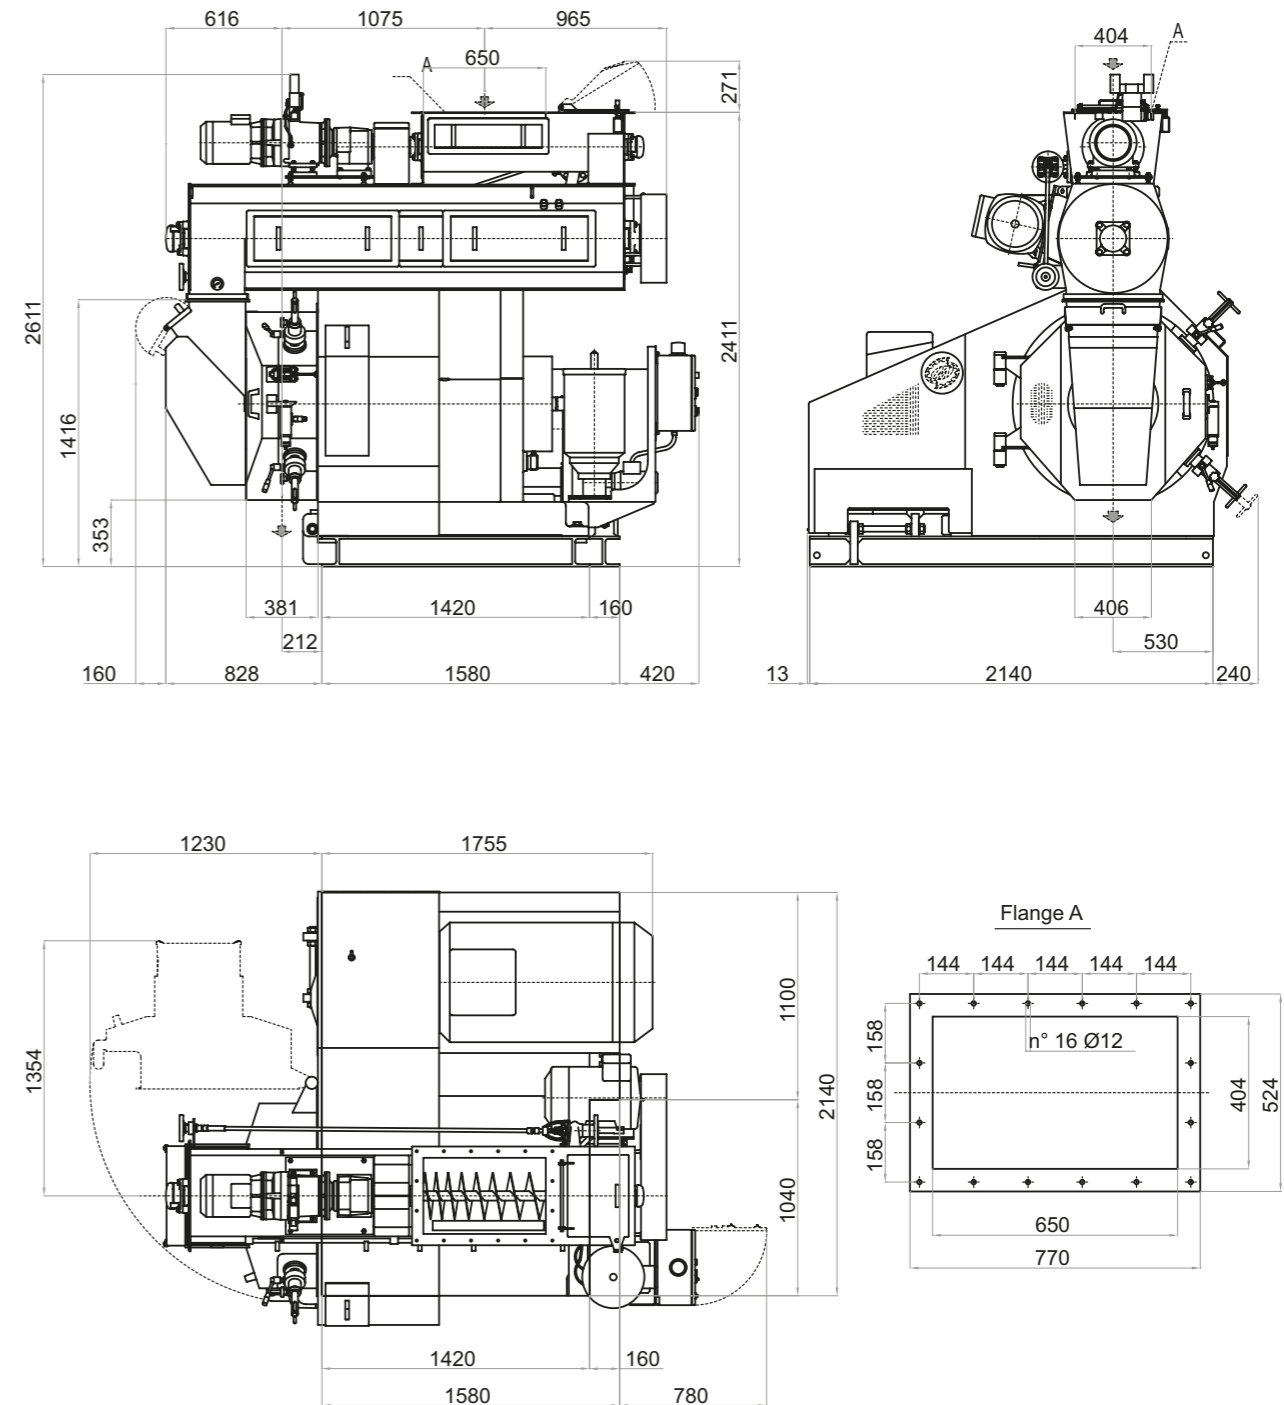

CLM
630
220HP

THIS MODEL IS PART OF THE SERIES

"630" units and uses interchangeable series 630 spare parts. It can handle motors of up to 160 kW (220 hp). Its quality/price ratio makes it an excellent choice for use in mid-sized/large feed production plants. It is suggested for chicken feed but also performs well in the production of cattle feed.

The pellet mill can handle three different size dies:

- narrow die, Lamec 630.150 (for working extremely fibrous feed)
- wide die, Lamec 630.200 (for working cattle feed)
- extra-wide die, Lamec 630.240 (for working cereal-rich and extremely fatty feed).

A "COMPACT" model of this mill is also available which is smaller and requires less space.

Capacity: 10 - 15 t/h

Overall dimension: 2150 x 2650 x 2700 mm

Compact model: 1540 x 2550 x 2720 mm



ANIMAL FEEDS

la meccanica
Technology & Creativity at your Service



LA MECCANICA SRL DI REFFO

administration and production: via nicolini, 1
loc. faccia - 35013 cittadella - pd - italy
tel: +39 049 9419000 - fax: +39 049 5972171
lameccanica@lameccanica.it



www.lameccanica.it

Silokonsult
PROCESSTEKNIK SWEDEN AB

Kämpagatan 1
SE-532 36 Skara
+46 511 10365
info@silokonsult.se
www.silokonsult.se