

DIRECT DISCHARGE SCREEN WITH CENTRAL MOTOR

Technical data sheet



Silokonsult
PROCESSTEKNIK SWEDEN AB


Kämpagatan 1
SE-532 36 Skara
+46 511 10365
info@silokonsult.se
www.silokonsult.se

Description

The direct discharge circular vibrating screens with central motor are used for solid/liquid separation. Thanks to the level of productivity they can assure, these screens may be equipped with very fine meshes, for extremely accurate filtering of the liquid fraction.

You may also use multiple overlapping meshes, to separate the solid fraction according to particle size.

Dimensioni

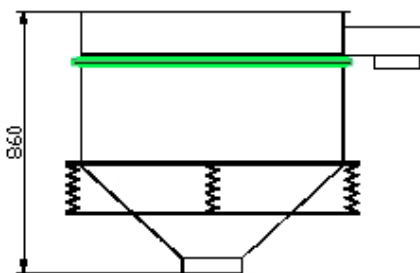

- Ø 600
- Ø 760
- Ø 900
- Ø 1200
- Ø 1500
- Ø 1800
- Ø 2200

Fields of application

- Solid/liquid separation

Functions

- Straight-line distribution
- Normal spiral distribution
- Various spiral distribution
- Centripetal spiral distribution

Accessories

- Self-cleaning ball system
- Self-cleaning kleener system
- Self-cleaning brush system
- Cover
- Meshes

Silokonsult